


**MDF Slotwall**

# Organize Your Way with Ready-to-Go Modular Solution

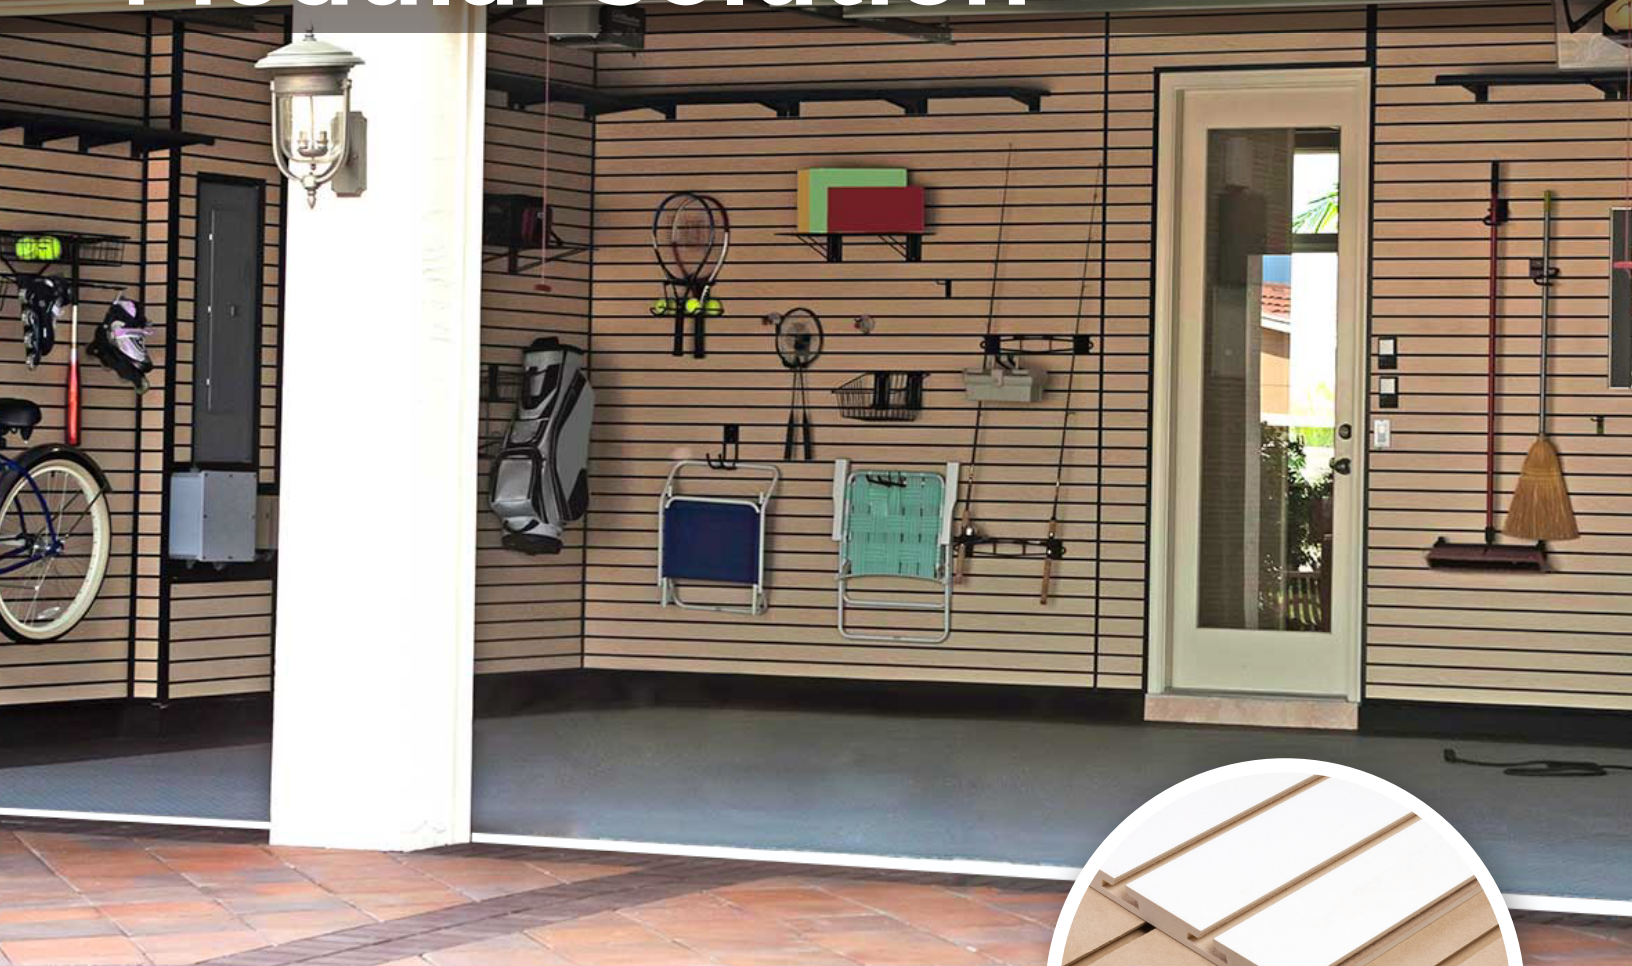

## **Configures Easily to Meet Your Needs**


Ideal DIY solution for garage and workshop organization, retail fixtures and exhibit displays

- Installs quickly and easily
- Practical and decorative
- Removes and reinstalls easily

## SPECIFICATION SHEET

### Organize Your Space with Style

ARAUCO Slotwall is an ideal solution for organizing your garage or workshop and offers a versatile option for display fixtures in retail and exhibit settings.

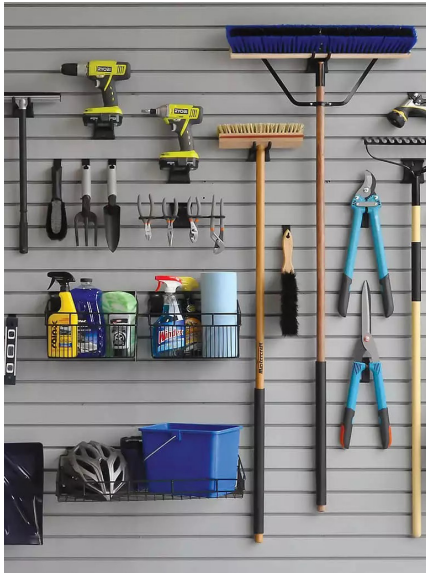

Slotwall Accessories and Aluminum Inserts sold separately.

You can easily configure and update the wall system with a wide variety of modular hardware accessories available at The Home Depot. Organize the way you want with hooks and hangers, shelves, baskets and bins, paper towels holders and more. You can also increase the load carrying capacity of the panel by accessorizing with aluminum inserts in the grooves.

ARAUCO Slotwall installs easily on multiple mounting surfaces including wood, metal, concrete and drywall.

### Ideal for Garage and Workshop Organization

- Attractive solution for retail and exhibit display fixtures
- Configures easily with a variety of readily available hardware
- Mounts easily on multiple surfaces
- Easy to remove and reinstall
- Load carrying capacity can be increased with aluminum groove inserts
- Made with FSC® Chain of Custody Certified (FSC®-C019364) Wood Fiber
- Complies with EPA TSCA Title VI
- For interior use only. Not recommended for use in areas of high humidity.

### Fastening Recommendations

- Align the panels with as many studs as possible. Ideally, fasten the slotwall in all studs 16" on center across the width of the panel, and vertically about 12" apart.
- Fasten panels directly to studs with 1-1/2" screws, or 2" screws if going through drywall.
- If either end of the panel does not fall on a stud, use an appropriate drywall anchors to secure the ends.
- Pre-drill metal inserts and screw through the back of the insert to anchor it to the stud.
- It is recommended to use furring strips when attaching to concrete or masonry.

### Storage and Handling

TRUPAN MDF products should never be stored or used outdoors. The indoor storage area should be clean, dry, well ventilated, and free of dust, dirt or particles that could contaminate the MDF. Store flat on stickers on a level, hard, dry surface. Constant relative humidity and temperature should be maintained. Before use, acclimatize for 48 - 72 hours to the same conditions as are expected after the panel is installed. For more information, see Composite Panels Association Technical Bulletin: Storage and Handling of Particleboard and MDF.

## SPECIFICATIONS

Product	Dimensions			Finish
	Thickness	Length	Width	
	in	in	in	
TRUPAN Slotwall	3/4	48	12	Natural - White TFL

### Installation Detail

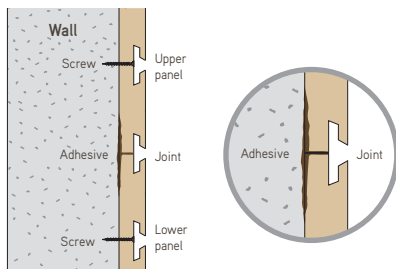


Fig. 1

Distance between grooves: 3" on center

### Maximum Recommended Load

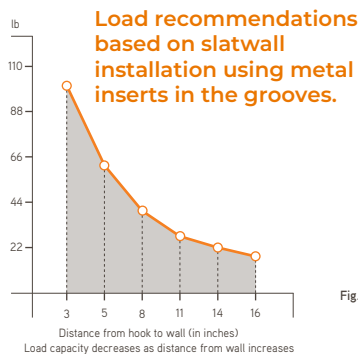


Fig. 2



White TFL Finish



Natural Finish

Note: Specifications and characteristics subject to change without notice.